


CERTIFICATE

This is so certify that the project report titled " Concrete Lining of Canal Major project "by Shashi Bhushan(18CE-26L) for the partial fulfilment of the award of the degree of **Bachelor Of Technology in CIVIL ENGINEERING** by Lingaya's Vidyapeeth, Faridabad is a record of a bonafide work carried out by them under my supervision during the year 2022 .

The contents of this report have not been submitted to any other University institute for award of any degree or diploma.




Dr. Maniraj M.

(Head of Department)

Department of civil Engineering

Lingaya's Vidyapeeth

Faridabad



Mr. Chitranjan Kumar

(Assistant professor)

Department of Civil engineering

Lingaya's Vidyapeeth

Faridabad

DECLARATION

I, **Shashi Bhushan** 18CE-26L, the student of Bachelor of Technology in Civil Engineering during session **2018-2022** at Lingaya's Vidyapeeth, Faridabad (Haryana) hereby declare that the work presented in this report titled "**ConcrteLining Of Canal major Project**" is the one of our own bonafide work and is correct to the best of my knowledge and this work has been undertaken care of Engineering ethics.

It contains no material previously published without referring or written by another person nor material which had been accepted for the award of any other degree or diploma of the university or other institute of higher learning, except where due acknowledgment has been made in the text.

Shashi Bhushan

Shashi Bhushan

Submitted by
Shashi Bhushan
18CE-26L

ACKNOWLEDGEMENT


I would like to thank my guide, Mr. Chitranjan Kumar (Assistant professor) for his very valuable guidance, his support and his critical suggestions throughout the completion of our project.

It was a privilege to study under his supervision. His vision and broad knowledge played an important role in the project work. I would also like to thank him for pushing me to the stage that I thought I could never Accomplish.

Allow me to express my sincere gratitude to Mr. Chitranjan Kumar (Assistant professor) for his tremendous and selfless support in design of the project and time management skills while executing the project

It is my great honour to have had the opportunity to work with these great minds and their remarkable characters. Their spirit of enthusiasm and commitment even in the times when we found it hard to do it is commendable.

Also, I appreciate the moral support of Mr. Chitranjan Kumar (Assistant professor) during our project work.

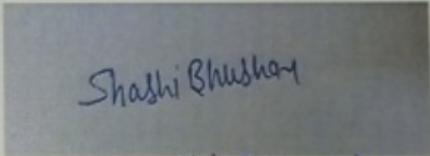

Shashi Bhushan

Shashi Bhushan
Submitted by

Shashi Bhushan

18CE-26L

Table of Contents

Acknowledgments

Abstract

Chapter 1 Introduction

1.1 Explanatory Memo

1.1.1 Project Provision

1.1.2 Benefit Cost Ratio

Chapter 2 Estimated Cost

2.1 Abstract of Cost

2.2 Detail of Quantity

2.3 Detail of Earth Work

2.4 General Abstract of Cost

Chapter 3 Design and Drawing of Canal

3.1 Layout Plan

3.1.1 Existing shape of Canal(Earthen Channel)

3.1.2 Design x-section of Canal

Chapter 4 Design of Canal(After Execution of work

4.1 Work in Progress at site

4.1.1 After completion of Concrete lining of Canal

Chapter 5 Benefits(Comparison Earthen Canal with Concrete lining Canal)

Chapter 6 Conclusion